file=

DETOUR M4 - 9L (LEFT) [30" x 24"] M4 - 9R (RIGHT) [30" x 24"] (5 S.F.) M4 - 9 (L or R) (S) [48" x 36"] (12 S.F.) DETOUR M4 - 9LX (LEFT) [30" x 24"] M4 - 9RX (RIGHT) [30" x 24"] (5 S.F.) M4 - 9 (L or R) XS [48" x 36"] (12 S.F.)

ROAD WORK NEXT ____ G20 - 1 [60" x 24"] (10 S.F.) **END** ROAD WORK G20 - 2A [48" x 24"] (8 S.F.)

SPEED LIMIT

> (12 S.F.) R2 - 1 (S) [48" x 60"] (20 S.F.)

R2 - 1 [36" x 48"]

DO NOT PASS

R4 - 1 [24" x 30"] (5 S.F.)

ROAD CLOSED

LOCAL TRAFFIC ONLY

R11 - 3 [60" x 30"]

(12.5 S.F.)

ROAD CLOSED

TO

THRU TRAFFIC

R11 - 4 [60" x 30"]

(12.5 S.F.)

MILES AHEAD

ROAD ROAD CLOSED **NARROWS**

R11 - 2 [48" x 30"] W5 - 1 (S) [48" x 48"] (10 S.F.) (16 S.F.)

W6 - 3 [48" x 48"] (16 S.F.)

PREPARED

TO STOP

ONE LANE ROAD W20 - 4 [48" x 48"] (16 S.F.)


__LANE

(L OR R) (CENTER) W20 - 5 [48" x 48"]

W20 - 7a [48" x 48"] (16 S.F.)



W21 - 5 (S) [48" x 48"] (16 S.F.)



M4 - 9N [30" x 12" MIN.] (2.5 S.F.)

(SIZE WILL VARY WITH LENGTH OF

STREET NAME) STREET NAME SIGN TO BE USED IN CONJUNCTION WITH M4 - 9 SIGNS BLACK ON ORANGE



[24" x 24"] (4 S.F.)

KEEP

LEFT

[24" x 24"]

(4 S.F.)

[30" x 30"] (S)

(6.3 S.F.)

NOTE:

[30" x 30"] (S) (6.3 S.F.)



THE BORDER, THE WORDS "GIVE US A", "SLOW

DOWN!", AND THE BRAKE PEDAL ARE BLACK;

LEAVING THE WORD "BRAKE" ORANGE.

W99 - 2 [48" x 48"] (16 S.F.)

BUMP

W8 - 1 (S) [48" x 48"]

(16 S.F.)

W8 - 9a [48" x 48"]

(16 S.F.)

GROOVED

PAVEMENT

AHEAD

W8 - 14 [48" x 48"]

(16 S.F.)

GROOVED

PAVEMENT

W8 - 14A [48" x 48"]

(16 S.F.)

GENERAL NOTES:

- DIMENSIONS, COLORS AND DETAILS OF VARIOUS SIZE SIGNS, AND ACCESSORY PANELS TO FOLLOW STANDARDS IN THE CURRENT "STANDARD HIGHWAY SIGN PUBLICATION" AND THE CURRENT "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS".
- (S) REPRESENTS A SPECIAL SIZE SIGN.
- LETTERS AND NUMERALS SHALL CONFORM TO THE CURRENT MANUAL, "STANDARD ALPHABETS FOR HIGHWAY SIGNS" U.S. DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION.
- THE CONTRACTOR SHALL OBTAIN THE APPROVAL OF THE ENGINEER FOR THE DISTANCE TO BE USED ON THE ADVANCE WARNING SIGNS, AND FOR THE SPEED LIMIT TO BE USED ON THE R2-1 SIGN.
- DISTANCE LEGEND: SIGN NUMBER FOLLOWED BY LETTER & DISTANCE

LETTER	DISTANCE
Α	1500′
В	1000′
С	500'
D	MILE
E	MILES AHEAD
F	AHEAD

BACKING MATERIAL

- 1. ALUMINUM SHALL BE FLAT SHEET OF ALLOY AND TEMPER 5052-H38 OR 6061-T6 :
- A. 0.10" THICK FOR ALL CONSTRUCTION SIGNS EXCEPT SIGNS SHOWN MOUNTED ON BREAKAWAY BARRICADES.
- B. 0.024" THICK FOR ALL CONSTRUCTION SIGNS SHOWN MOUNTED ON BREAKAWAY BARRICADES.

TEMPORARY SIGN SUPPORTS

- 1. SIGN SUPPORTS SHALL BE OF WELL SEASONED LUMBER, S4S, FREE OF SPLITS, KNOTS AND WARPS, OR OF STEEL COMPONENTS.
- WOOD POSTS SHALL HAVE A UNIFORM CROSS-SECTION AND SHALL NOT EXCEED THE FOLLOWING DIMENSIONS FOR:

SINGLE POST = $4'' \times 6''$ TWO POSTS = $3'' \times 6''$ OR $4'' \times 5''$ THREE POSTS = $3'' \times 5''$ OR $4'' \times 4''$

4" X 6" WOOD POSTS SHALL BE MODIFIED BY DRILLING 11/2 INCH DIAMETER HOLES 4 INCHES AND 18 INCHES ABOVE THE GROUND LINE AND PERPENDICULAR TO THE ROADWAY CENTERLINE.

- NO BRACING IS PERMITTED. VERTICAL CLEARANCES FOR SIGNS MOUNTED ON WOOD SUPPORTS SHALL BE 7 FOOT MINIMUM. EMBEDMENT DEPTH FOR THE WOOD POST SHALL NOT EXCEED 3.5 FEET.
- STEEL POSTS SHALL BE IN ACCORDANCE WITH THE STANDARD DETAIL FOR U-POST SIGN SUPPORT.
- TEMPORARY SIGN SUPPORTS NOT MEETING THIS CRITERIA SHALL BE SHIELDED BY A LONGITUDINAL BARRIER OR CRASH CUSHIONS.

SIGN FACES

SIGN FACES SHALL BE ASTM D 4956 TYPE VII OR VIII FLUORESCENT ORANGE SHEETING.

FASTENING

ALL SIGNS SHALL BE SECURELY FASTENED TO THEIR SUPPORTS WITH BOLTS, NUTS AND WASHERS IN ACCORDANCE WITH THE SPECIFICATIONS.

CONSTRUCTION SIGNS N.T.S.


NEW JERSEY DEPARTMENT OF TRANSPORTATION


CONSTRUCTION DETAILS


18 146

CD-159-6

CD-159-6.1

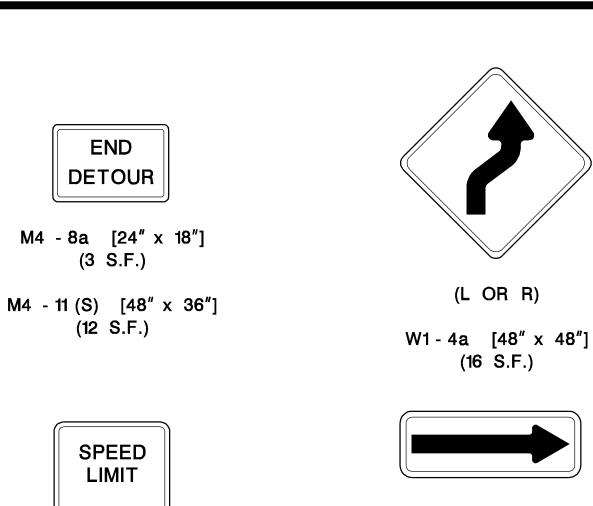






W1 - 6 (S) [60" x 30"] (12.5 S.F.)

(L OR R)

W4 - 2 (S) [48" x 48"]

(16 S.F.)



W20 - 2 [48" x 48"] (16 S.F.)

MPH

W13 - 1 [18" x 18"]

(2.3 S.F.)

W13 - 1 (S) [24" x 24"]

(4 S.F.)

ROAD

WORK

W20 - 1A [48" x 48"]

(16 S.F.)



W20 - 3 [48" x 48"] (16 S.F.)





(16 S.F.)

W20 - 7b [48" x 48"] (16 S.F.)

DETOUR

M4 - 9X [30" x 24"]

(5 S.F.)

M4 - 9X (S) [48" x 36"]

(12 S.F.)

DETOUR

M4 - 10L (LEFT) [48" x 18"]

M4 - 10R (RIGHT) [48" x 18"]

(6 S.F.)