



NOTE:
For elevations of points "A", "B", "C" and "D", see General Plan and Elevation Sheet.

TYPICAL SLOPE PLAN
 $\frac{1}{8}'' = 1'-0''$

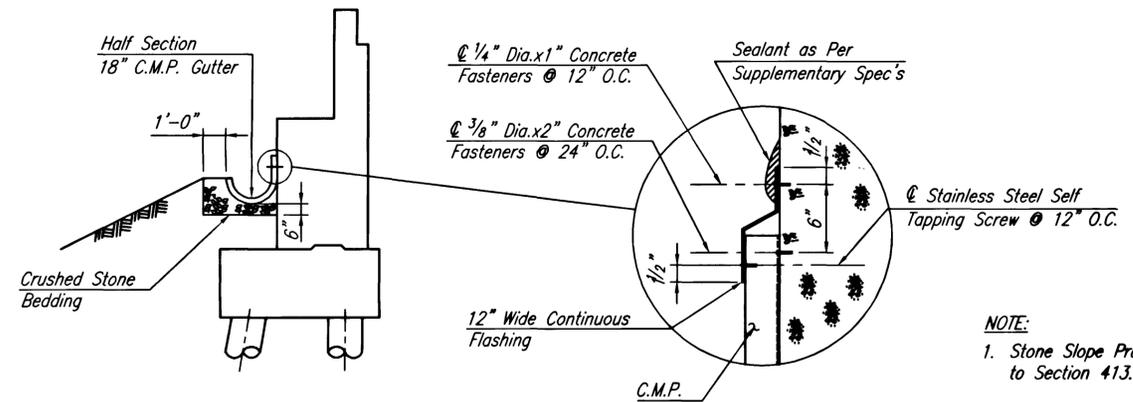

TYPICAL SECTION
18" CMP ABUTMENT TROUGH
 $\frac{1}{4}'' = 1'-0''$

- NOTE:
1. Stone Slope Protection shall conform to Section 413.
 2. Power driven fasteners may be used. If power driving results in cracking of the abutment face, expansion type fasteners will be required.
 3. Upper and lower fasteners shall be staggered 6" horizontally.

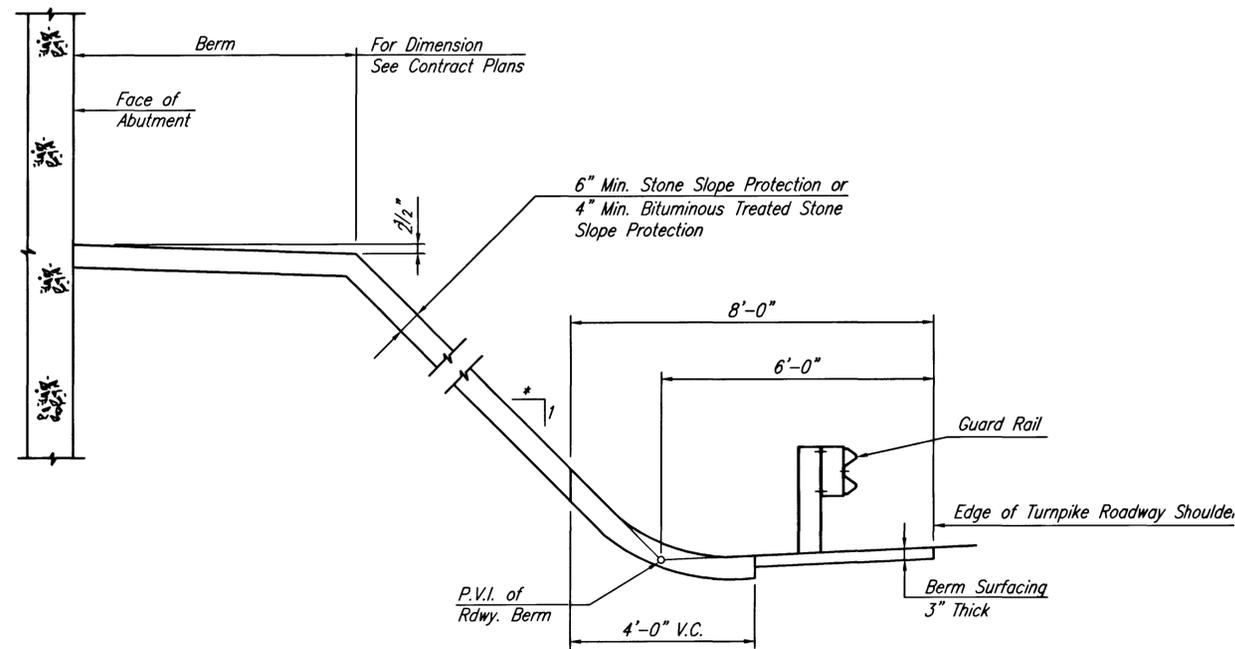

* For slopes, see General Plan; no steeper than 1/2:1.

TYPICAL SECTION
 $\frac{1}{2}'' = 1'-0''$



NEW JERSEY TURNPIKE AUTHORITY
NEW JERSEY TURNPIKE

STONE SLOPE PROTECTION

App.	No.	DATE	REVISION
		2/05	REISSUED; CONFORMS TO 2004 SPECS

OFFICE OF THE CHIEF ENGINEER
WOODBIDGE, NEW JERSEY

2004 STANDARD
DRAWING
BR-8

CONTRACT NO.

SHEET NO.

OF