




PARTIAL PLAN AT SIDEWALK
N.T.S.

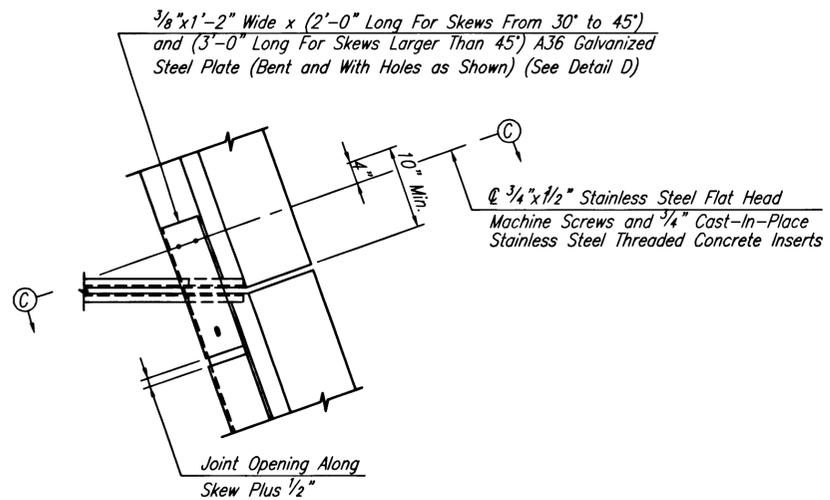


PARAPET COVER PLATE
N.T.S.

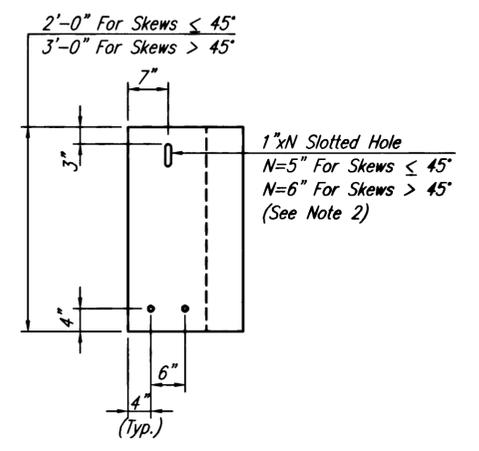

DETAIL D
N.T.S.

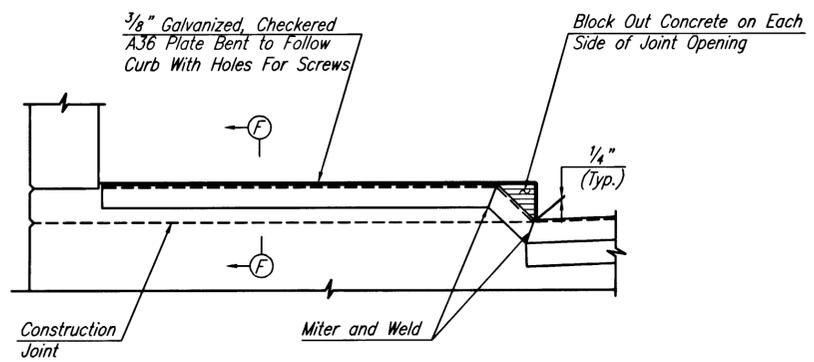


SECTION E-E
N.T.S.

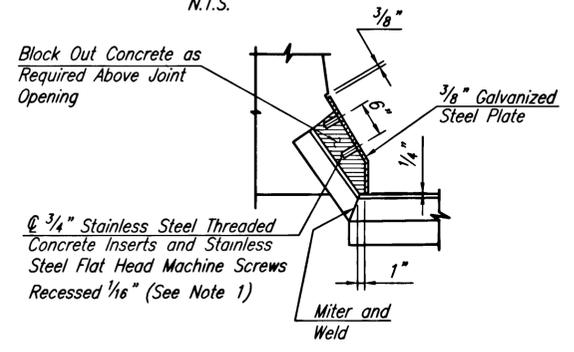


SECTION C-C
N.T.S.

NOTES:

1. 3/4" x 1/2" stainless steel flat head machine screws with 3/4" cast-in-place stainless steel threaded inserts. Recess 1/16" below plate surface.
2. Hole slotted parallel to direction of movement with 1-3/4" x 1/2" stainless steel flat head machine screw recessed 1/16" below plate surface in 3/4" cast-in-place stainless steel threaded insert. Do not over tighten machine screw.
3. Payment for the item Strip Seal Expansion Joint includes gland, extrusions and end welded studs. All other steel work shall be included in the item Structural Steel.

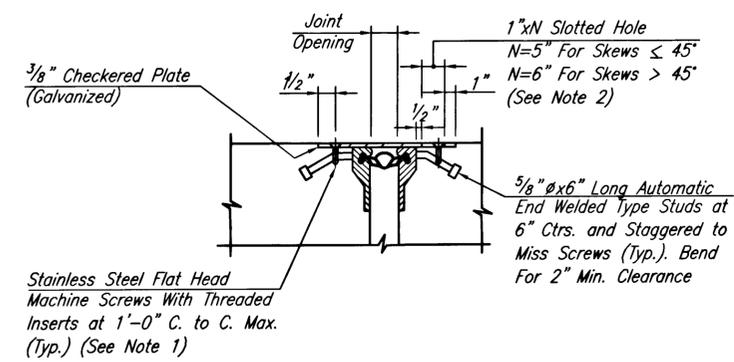

SECTION F-F
N.T.S.



**NEW JERSEY TURNPIKE AUTHORITY
NEW JERSEY TURNPIKE**

STRIP SEALS - II

OFFICE OF THE CHIEF ENGINEER WOODBIDGE, NEW JERSEY	2004 STANDARD DRAWING BR-14
---	---------------------------------------

App.	No.	DATE	2/05 REISSUED; CONFORMS TO 2004 SPECS.			REVISION			