

DELINEATOR ASSEMBLY CLASSIFICATION

Delineator assemblies will be called for on the plans by use of the following identification system:

- 1st Letter: P= Post Mounted (Flanged Channel Post)
 G= Guard Rail Mounted (Bar)
 B= Bridge Rail Mounted (Bracket)
 C= Concrete Barrier or Parapet Mounted (Bent Bar)
 F= Fence Mounted (Bar) - See DE-2
- 2nd Letter: Mounting Type (A,B,C or D)
- 3rd Letter: S= Single Reflector
 D= Double Reflector
- 4th Letter: If shown, X = Double Facing Reflector

The above system will be followed by a dash, and a letter designating the color:


- W= White (Crystal)
 Y= Yellow (Amber)
 R= Red

Reflectors Required


Designation	Number
S	1
SX	2
D	2
DX	4

NOTES:


- Where alignment of reflectors on Bridges does not coincide with alignment on approaches, smooth reverse curves shall be used for the transition area as approved by the Engineer.
- Reflector at Bridge approach shall be red; at trailing end, yellow.
- Steel mounting pieces and hardware shall be galvanized after fabrication per Subsection 909.11 of the Standard Specifications.
- Reflectors per Subsection 923.18 of the Standard Specifications

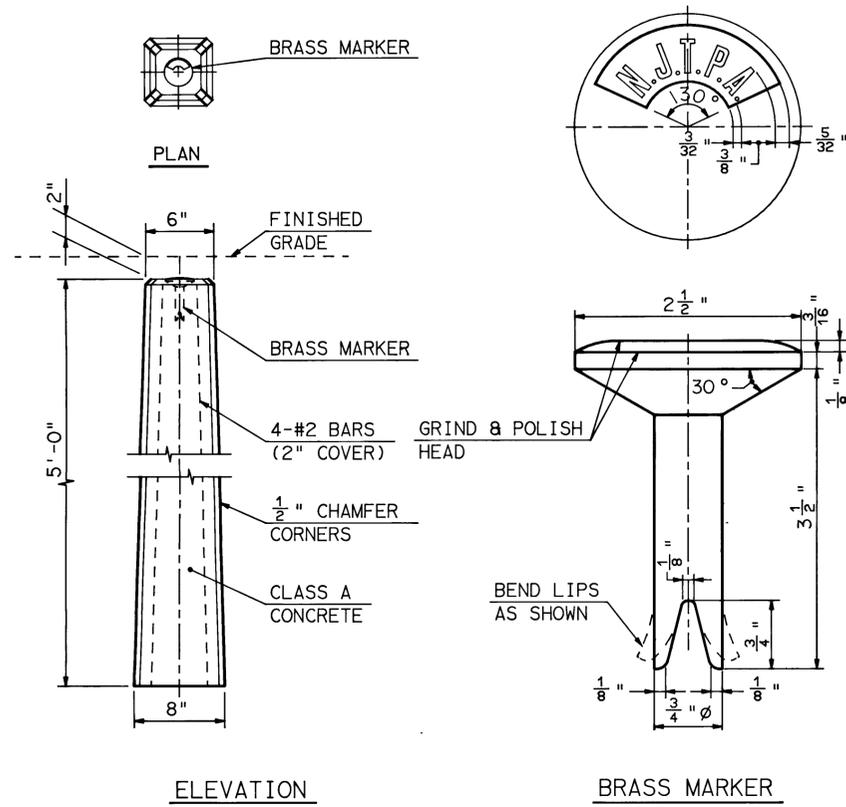


ELEVATION

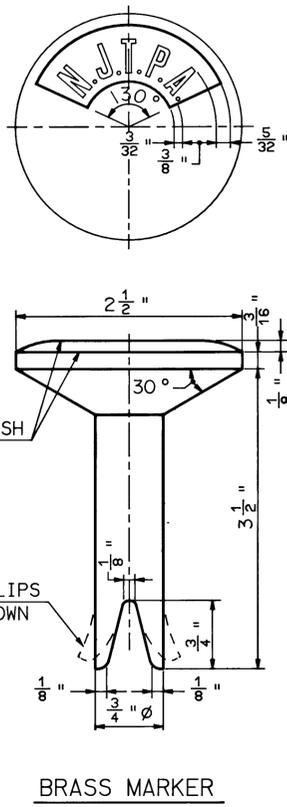

BRASS MARKER

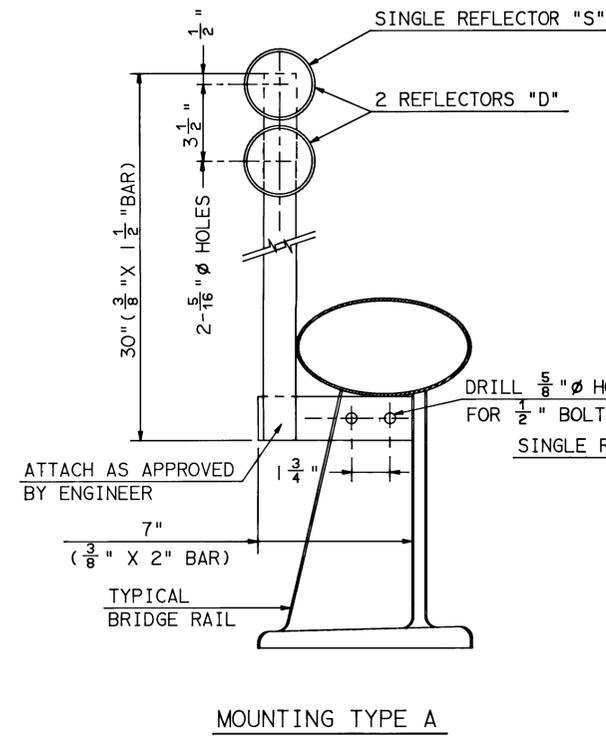

MOUNTING TYPE A

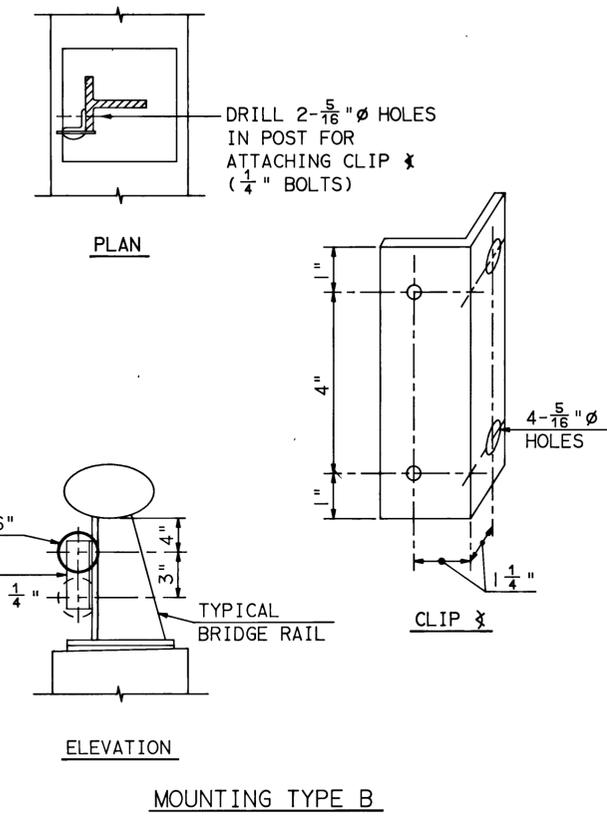


MOUNTING TYPE B


CONCRETE MONUMENT

BRIDGE RAIL MOUNTED (B)


(MOUNTING BRACKETS TO BE ALUMINUM OR STEEL TO MATCH BRIDGE RAIL MATERIAL)

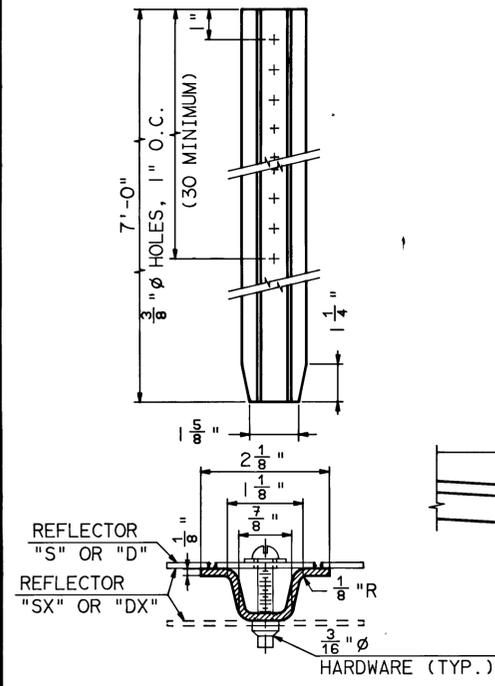


FLANGED CHANNEL POST

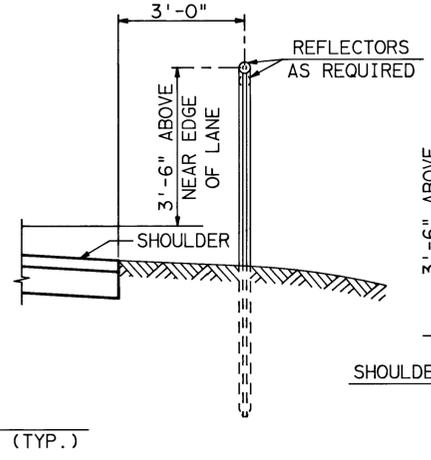


MOUNTING TYPE A

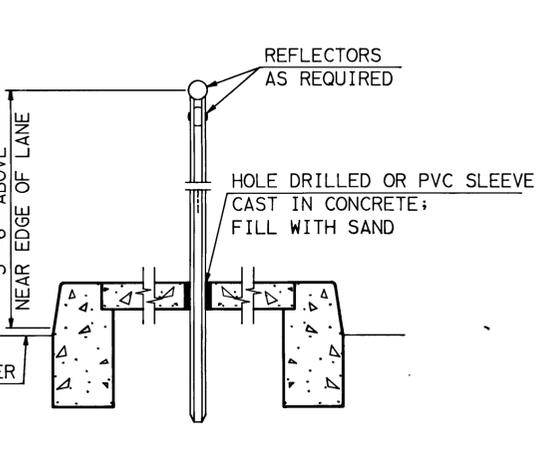


MOUNTING TYPE B

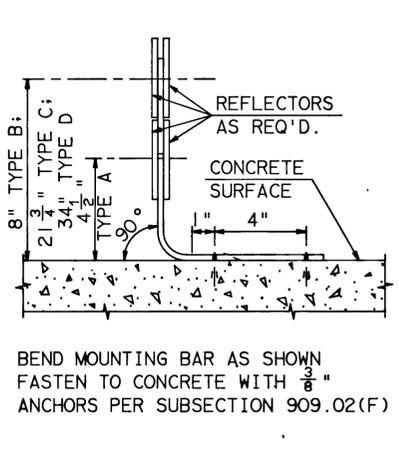

CONCRETE MOUNTED (C)
(BARRIER OR PARAPET)

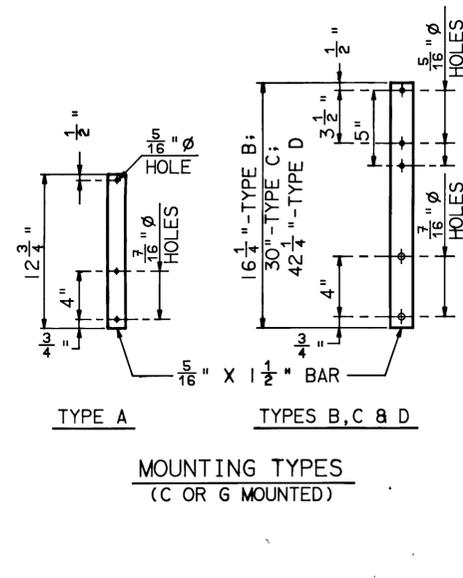

MOUNTING TYPES
(C OR G MOUNTED)

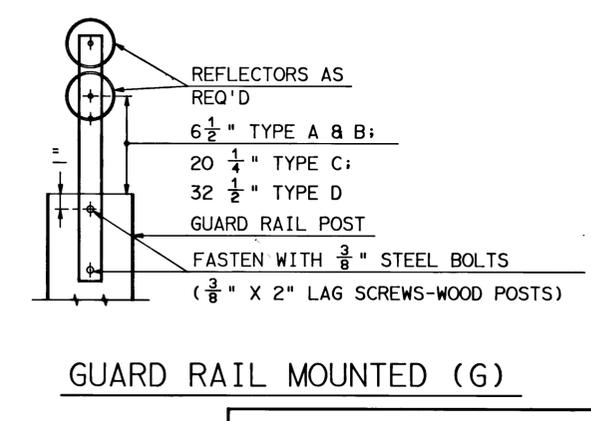

GUARD RAIL MOUNTED (G)

POST MOUNTED DELINEATOR (P)

NEW JERSEY TURNPIKE AUTHORITY NEW JERSEY TURNPIKE	
DELINEATOR AND MONUMENT DETAILS	
OFFICE OF THE CHIEF ENGINEER NEW BRUNSWICK NEW JERSEY	1987 STANDARD DRAWING DE-1

APP. NO.	DATE	REVISION
1	12/87	Minor Revisions.
	3/87	Reissued; Conforms to 1987 Specs.