



**ELEVATION**  
1/2" = 1'-0"

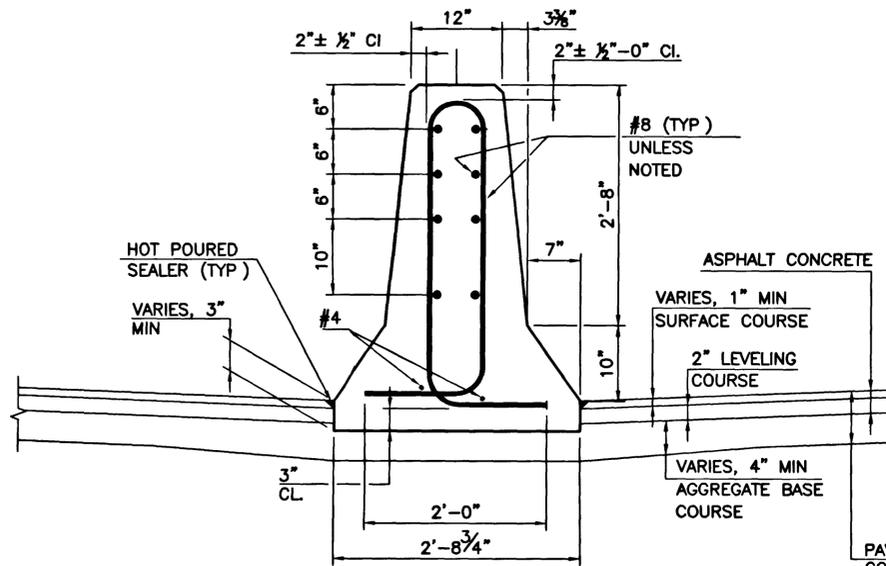

**SECTION A-A**  
1" = 1'-0"

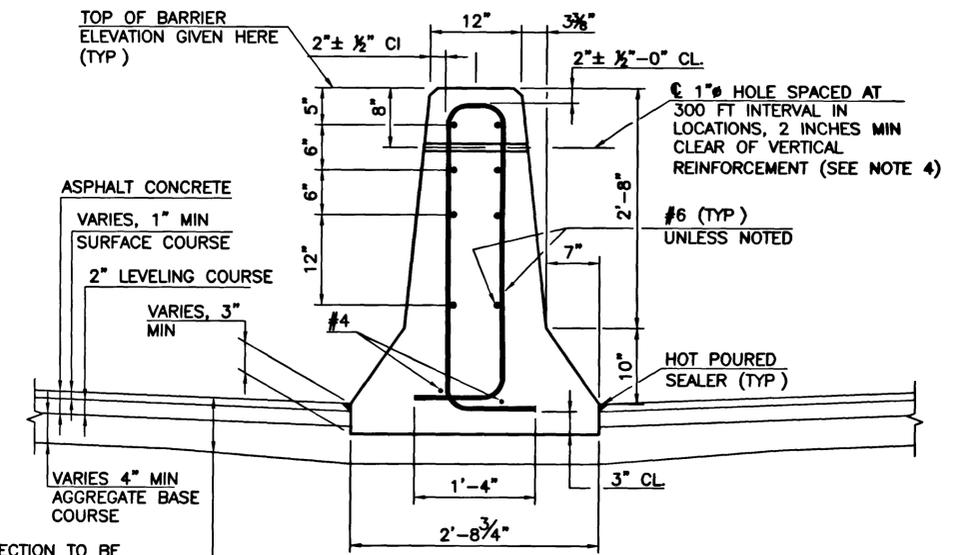


**SECTION B-B**  
1" = 1'-0"


**CONCRETE MEDIAN BARRIER, ROADWAY**

**NOTES:**


- 1 CONCRETE MEDIAN BARRIER SHALL CONFORM TO SECTION 508.
- 2 ALL REINFORCEMENT SHALL BE EPOXY COATED
- 3 FOR ROADWAY BARRIER ONLY, 1" EXPANSION JOINTS SHALL BE CONSTRUCTED AT ALL LOCATIONS SHOWN IN PLANS CONTRACTION JOINTS SHALL BE CONSTRUCTED AT 250 FT INTERVALS EXPANSION AND CONTRACTION JOINTS SHALL EXTEND THROUGH THE ENTIRE BARRIER SECTION.
- 4 WHEN 1" HORIZONTAL HOLES FALL WITHIN 100' OF CONCRETE MEDIAN BARRIER PROTECTION SECTIONS, A SECOND HOLE IS REQUIRED ON THE OTHER SIDE OF THE PROTECTION SECTIONS HOLES SHALL NOT BE PLACED IN HORIZONTAL TRANSITION, PROTECTION SECTION OR BRIDGE BARRIERS

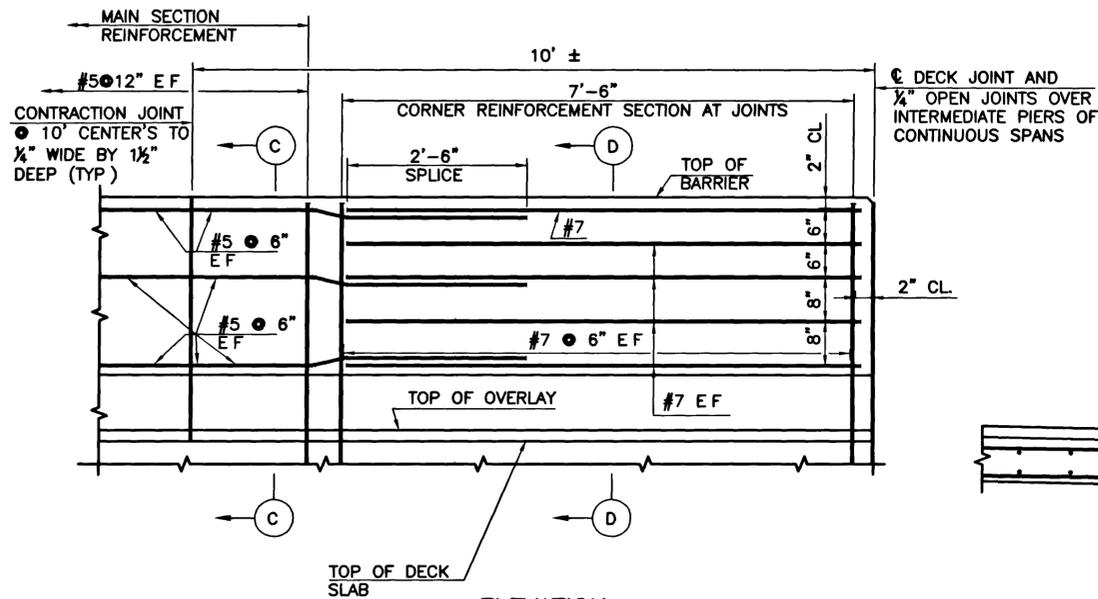

**ELEVATION**  
3/4" = 1'-0"

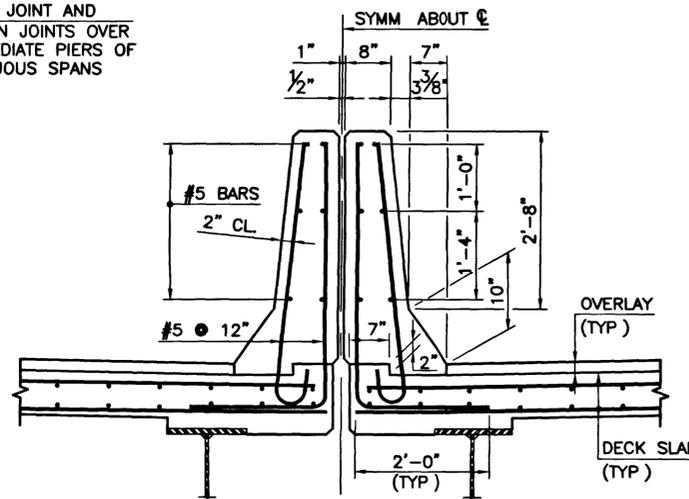

**SECTION C-C**  
3/4" = 1'-0"

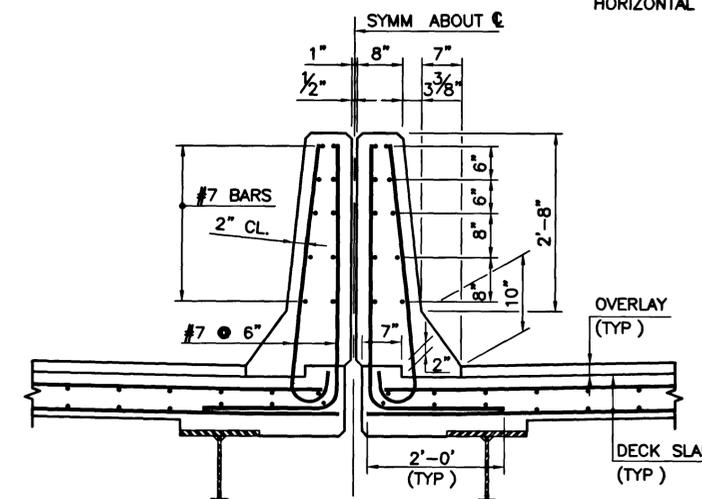

**SECTION D-D**  
3/4" = 1'-0"

**CONCRETE MEDIAN BARRIER, BRIDGE**



**NEW JERSEY TURNPIKE AUTHORITY  
NEW JERSEY TURNPIKE**

**MEDIAN BARRIER DETAILS**

App	No	DATE	REVISION
		4/05	REISSUED, CONFORMS TO 2004 SPECS

OFFICE OF THE CHIEF ENGINEER  
WOODBRIDGE, NEW JERSEY

2004 STANDARD DRAWING  
**MB-1**

CONTRACT NO.

SHEET NO.

OF